

# Adams 3 and 4 Light Chandelier




P1294, F2931/4\_ 1.1

# FEISS®

EST. 1955

05/15

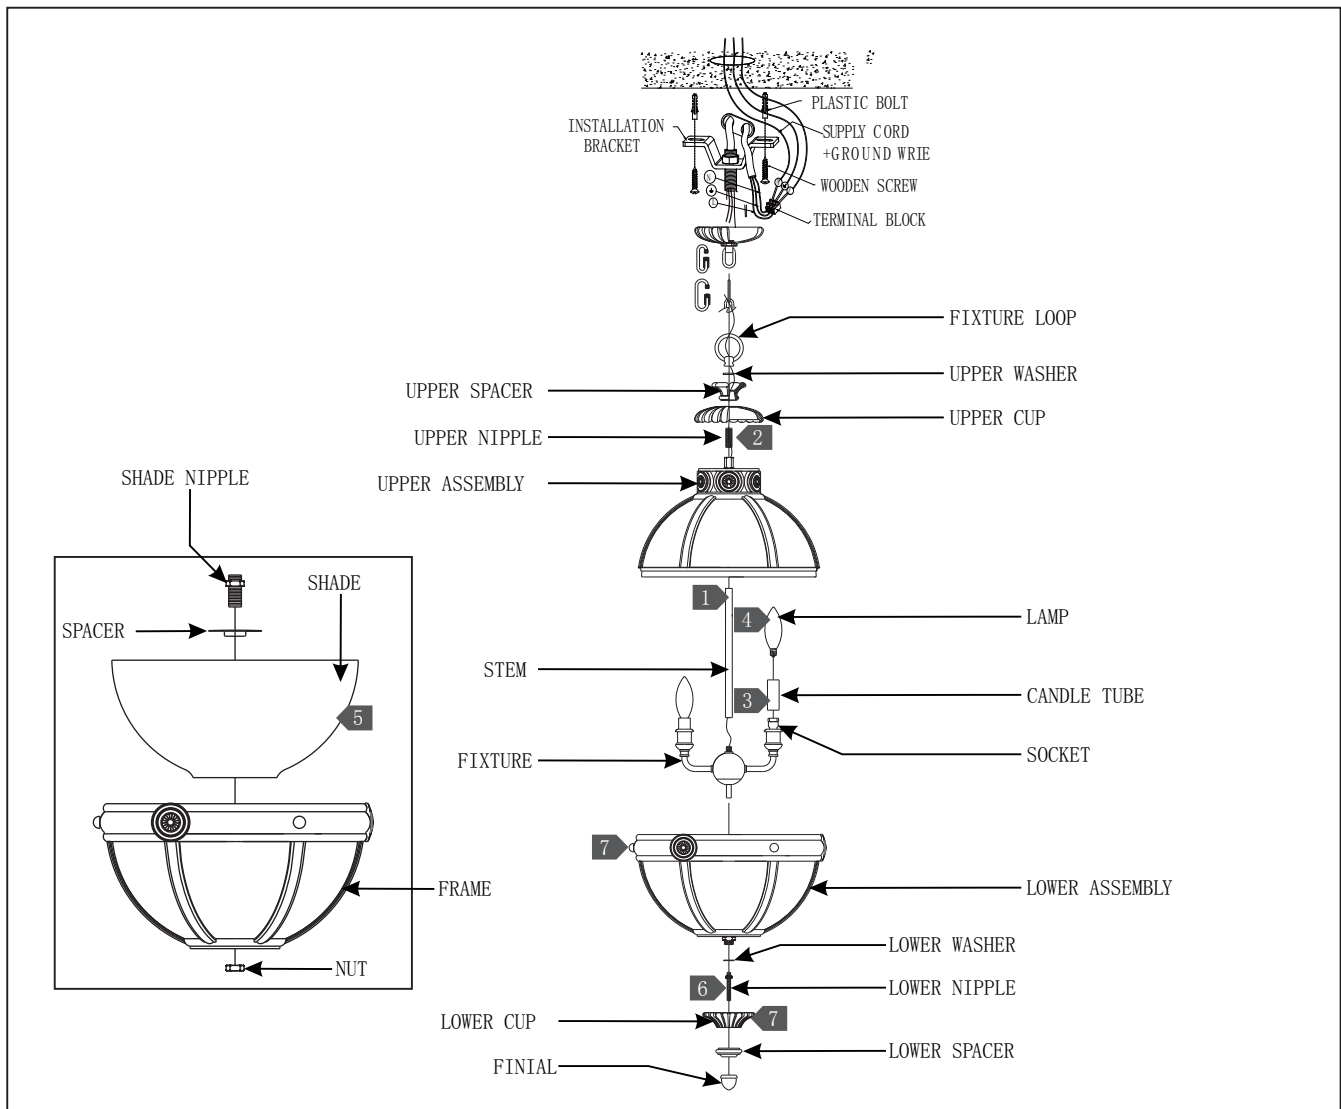

- 1 Screw the stem to the fixture, then screw the stem to the upper assembly.
- 2 Screw the upper nipple to the top of the upper assembly, then place the upper cup, spacer, and washer onto the threaded nipple and secure them together by tightening with the fixture loop.
- 3 Install the candle tubes by slipping them through the sockets.
- 4 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 5 Place the shade inside of the frame, then place the spacer and the shade nipple into the shade and secure them together by tightening the nut.
- 6 Place the lower washer onto the bottom of the fixture and screw the lower nipple to the bottom of the fixture.
- 7 Place the lower assembly, lower cup, and lower spacer over the lower nipple and secure them in place by tightening the finial.
- 8 Follow enclosed supplement installation instructions for electrical and fixture installation onto house ceiling.