

KICHLER

1) TURN OFF POWER.

IMPORTANT: Before you start, NEVER attempt any work without shutting off the electricity until the work is done.

- Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
- Unscrew the fuse(s), or switch "OFF" the circuit breaker switch(s), that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position. If the fixture to be replaced has a switch or pull chain, place those in the "OFF" position.

2) Find the appropriate threaded holes on mounting strap.

Assemble mounting screws into threaded holes.


3) Attach mounting strap to outlet box. (Screws not provided)

Mounting strap can be adjusted to suit position of fixture.

4) Grounding instructions: (See illus. A or B).

- On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
- On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.



If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, (not provided) after following the above steps. Never connect ground wire to black or white power supply wires.

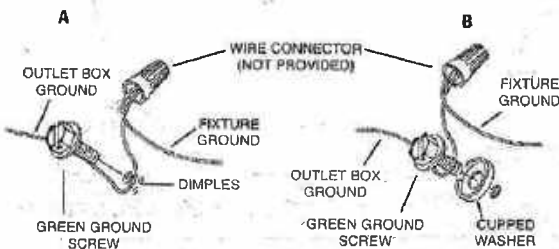

5) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used, The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

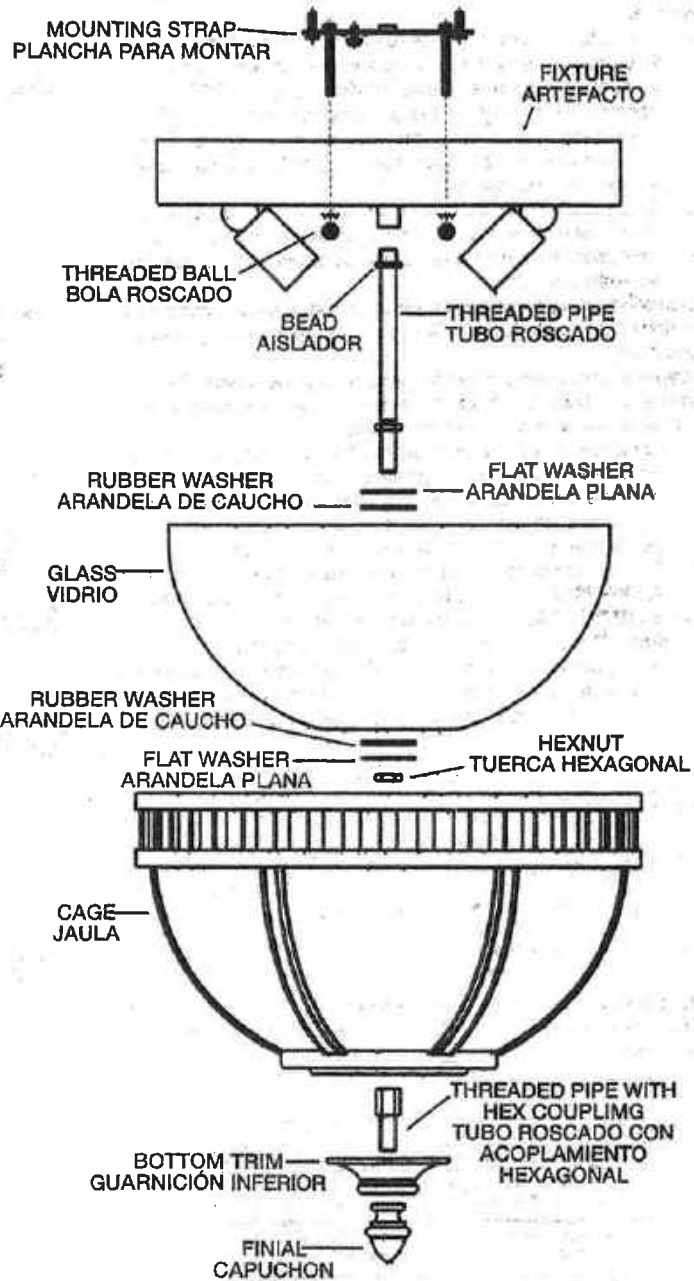

6) Push fixture to ceiling, carefully passing mounting screws through holes in canopy.

7) Screw threaded balls onto mounting screws. Tighten threaded balls to secure fixture to ceiling.

8) Insert recommended bulb.

9) Screw short end of threaded pipe with bead into coupling at bottom of fixture.

10) Slip flat washer then rubber washer over threaded pipe.

11) Raise glass up to fixture. Carefully pass hole in glass over end of threaded pipe.

12) Slip rubber washer then flat washer over threaded pipe and screw hexnut onto end of threaded pipe. (DO NOT over tighten.)

13) Raise cage up to fixture carefully passing threaded pipe through hole in cage.

14) Thread end of short threaded pipe with hex coupling onto end of threaded pipe protruding from bottom of cage.

15) Pass bottom trim over threaded pipe.

16) Screw finial onto threaded pipe. (DO NOT over tighten.)